

## FloorPro Allround Deep Cleaner RM 754



Highly efficient deep cleaning agent for easy removal of wax and polymer coatings on water-resistant and alkali-sensitive floors. No time-consuming rinsing required.



### Properties


- powerful deep cleaning agent for removing care films and dirt
- removes stubborn wax and polymer coatings
- Dissolves oil, grease and mineral stains
- Can be used anywhere
- wide range of applications: suitable for all water-resistant, alkaline-sensitive (e.g. linoleum) and alkaline-resistant (e.g. PVC) surfaces
- excellent material compatibility
- low pH in application concentration
- no time-consuming rinsing necessary
- also suitable for maintenance cleaning
- safe and easy to use
- Pleasant, fresh citrus fragrance
- Low-foam formulation

### Application areas:

<b>Building cleaning:</b>	Floor cleaning
<b>Nursing and retirement homes, doctor's surgeries:</b>	Floor cleaning
<b>Hotels, gastronomy, catering:</b>	Floor cleaning
<b>Municipal:</b>	Floor cleaning

### Usage options

- Scrubber driers
- Single disc machines
- Wet and dry vacuum cleaners
- Manual

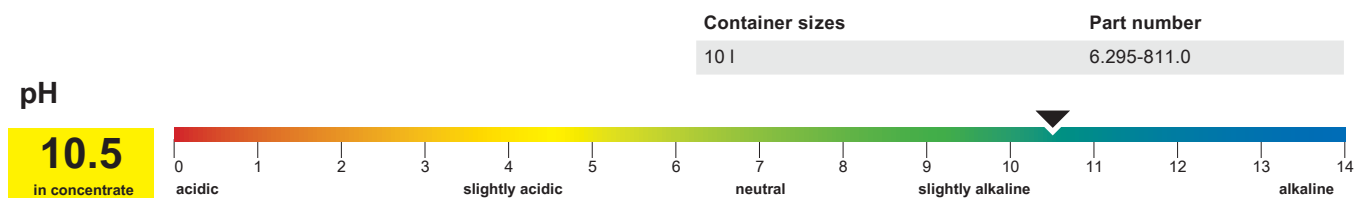

## Application:

### Deep cleaning (dirt)

- Remove coarse dirt by sweeping.
- Use appropriate brush/roller/pad or squeegee for scrubber drier or single disc machine.
- Dose the product with clean water accordingly.
- Wet surface evenly with product (using brush/roller/pad as required).
- Allow to soak.
- Contact time 1-10 minutes, depending on the degree of soiling.
- Clean surface with machine and appropriate accessories.
- Suck the dirt from the surface.
- Remove all dirt and cleaning agent residues with clear water (damp mop with low dose as required, rinse with clear water and soak in water with high dose).

### Deep cleaning (care film)

- Remove coarse dirt by sweeping.
- Use appropriate brush/roller/pad or squeegee for scrubber drier or single disc machine.
- Dose the product with clean water accordingly.
- Wet surface evenly with product (using brush/roller/pad as required).
- Allow to soak.
- Contact time 5-10 minutes, depending on the thickness of the care film.
- Clean surface with machine and appropriate accessories.
- Clean inaccessible areas manually.
- Suck the dirt from the surface.
- Remove all dirt and cleaning agent residues with clear water (damp mop with low dose as required, rinse with clear water and soak in water with high dose).

### Maintenance cleaning

- Remove coarse dirt by sweeping.
- Use appropriate brush/roller/pad and squeegee for scrubber drier as required.
- Dose the product with clean water accordingly.
- Clean and vacuum the surface in one procedure.

## Instructions for use:

- Test on an inconspicuous part for material compatibility.
- Do not apply to wood or unsealed parquet flooring.
- Do not use on surfaces sensitive to solvents such as asphalt.
- Do not let the cleaning solution dry out.
- Store away from frost.
- Only store in original container between -5 and +30°C.
- Clean the cleaning machine after use.

## Warnings and safety recommendations according to EC Directives:

- Warning
- H319 Causes serious eye irritation
- P280 Wear protective gloves/protective clothing/eye protection/face protection.
- P264 Wash thoroughly after handling.
- P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- P337 + P313 If eye irritation persists: Get medical advice/attention.

## Further information:

- Material Safety Data Sheet (MSDS)
- Quick Start
- FIGR expertise (Forschungs- und Prüfinstitut für Facility Management GmbH)

## Dosage and yield:

Contents:	Cleaning method:	Primary mixture:	Dosage:	Soiling:	Yield:
1000 ml	Deep cleaning (care film)		15-50 %	medium-strong	30-50 m²
1000 ml	Deep cleaning (dirt)		10-20 %	medium-strong	50-200 m²
1000 ml	Maintenance cleaning		1-3 %	light	2500 m²

Please contact us for more information:

**Alfred Kärcher SE & Co. KG**

Alfred-Kärcher Straße 28-40  
71364 Winnenden

Phone +49(0)7195-14-0  
Fax +49(0)7195-14-2212

[www.kaercher.com](http://www.kaercher.com)